


PT TRANSMITTER

SSN-AVC



- Converting an alternating voltage into a standard DC process signal.
- Monitoring abnormal voltage drops for detecting over load.
 - Measuring the rotating or moving speed of multi-speed motors, belt conveyers, metering pumps.
 - True R.M.S. sensing.
 - 1 or 2 outputs are available from 1 input.
 - Contains overvoltage protection circuit.
 - Transformer isolation type.

MODEL & SUFFIX CODE SELECTION

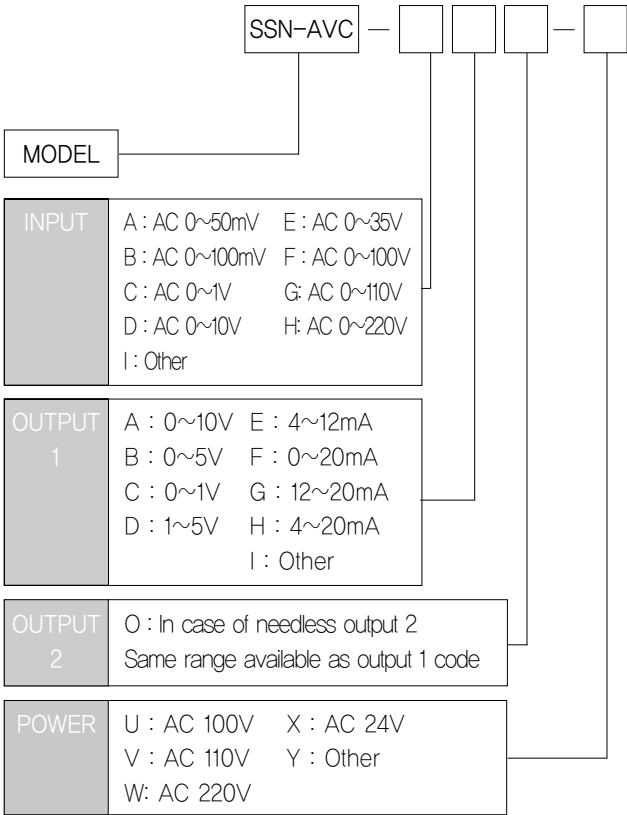

GENERAL SPECIFICATIONS

Input	AC Voltage		
Isolation/Type	Input to output to power/Transformer isolation type		
Power Supply	AC rating ±10%, approx. 3.5VA		
Accuracy	±0.35%(Max)		
Temp Coefficient	±0.02%, / °C(±0.008% / °F)		
Ripple	0.5% p-p(Max)		
Linearity	±0.3% F.S		
Insulation Resistance	Greater than 100MΩ with DC 500V		
Dielectric Strength	Input – Power	AC 2500V	1 minute
	Input – Output		
	Output 1 – Output 2		
	GND – Power		
	AC 1000V		
Front Adjustments	Zero and Span ±5%		
Overrange Output	approx-10% ~ 110% at DC 1~5V		
Response Time	≤0.5 sec (0~90%)		
Operating Temperature/Humidity	-20~60℃ / 90%(N.C)		
Storage Temperature/Humidity	-20~80℃ / 95%(N.C)		
Dimensions	W40×H129×D138(mm)		
Case Material	Aluminum		
Weight	about 450g		
Mounting	Wall mounting		

SIGNAL CONVERTER

SSN-AVC

INPUT & OUTPUT SPECIFICATIONS

Input Specification


Specification	Report
Frequency	50Hz or 60Hz
Input Burden	0,5VA(Max)

Output Load Resistance

Output	1 Point	2 Point		Remark
	Output	Output-1	Output-2	
4 ~ 20mA	700Ω	600Ω	350Ω	(Max)
0 ~ 20mA	700Ω	600Ω	350Ω	(Max)
2 ~ 10mA	1200Ω	1200Ω	700Ω	(Max)
1 ~ 5V	5000Ω	5000Ω	5000Ω	(Min)
0 ~ 1V	1000Ω	1000Ω	1000Ω	(Min)

BLOCK DIAGRAM

1 Point Output

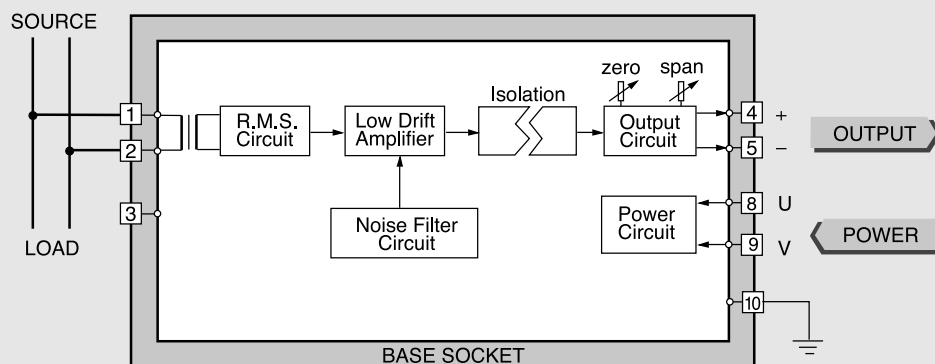

2 Point Output

