

CT TRANSMITTER


SSN-ACC



Converting an alternating current that receives from a CT-sensor into a standard process signal.

- Monitoring of power line and power supply current.
- Centralized monitoring and controlling of motors, pumps or heaters by DCS.
- True R.M.S. sensing.
- 1 or 2 outputs are available from 1 input.
- Contains overvoltage protection circuit.
- Transformer isolation type.

MODEL & SUFFIX CODE SELECTION

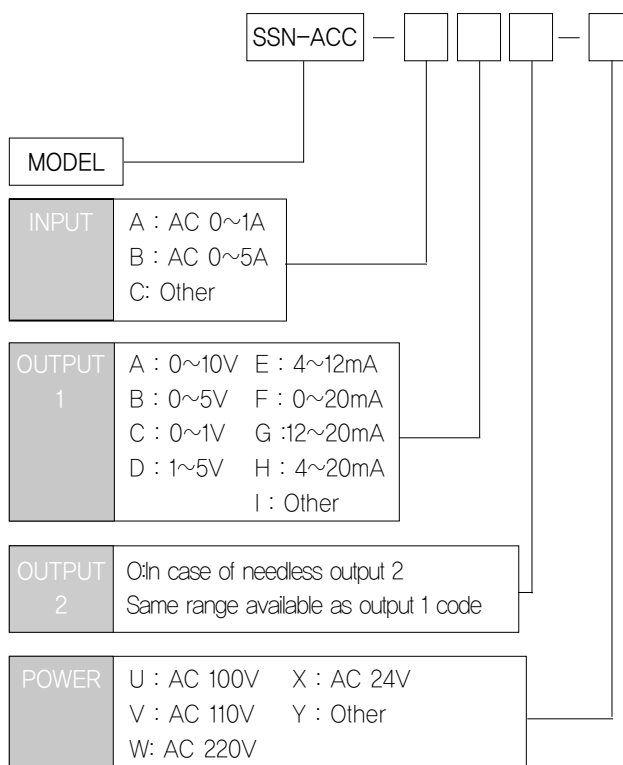

GENERAL SPECIFICATIONS

Input	AC Current(CT)		
Isolation/Type	Input to output to power/Transformer isolation type		
Power Supply	AC rating ±10%, approx. 3.5VA		
Accuracy	±0.35%(Max)		
Temp Coefficient	±0.02%, / °C(±0.008% / °F)		
Ripple	0.5% p-p(Max)		
Linearity	±0.3% F.S		
Insulation Resistance	Greater than 100MΩ with DC 500V		
Dielectric Strength	Input – Power	AC 2500V	1 minute
	Input – Output		
	Output 1 – Output 2		
	GND – Power		
Front Adjustments	Zero and Span ±5%		
Overrange Output	approx-10% ~ 110% at DC 1~5V		
Response Time	≤0.5 sec (0~90%)		
Operating Temperature/Humidity	-20~60℃ / 90%(N.C)		
Storage Temperature/Humidity	-20℃~80℃ / 95%(N.C)		
Dimensions	W40×H129×D138(mm)		
Case Material	Aluminum		
Weight	about 450g		
Mounting	Wall mounting		

SIGNAL CONVERTER

SSN-ACC

INPUT & OUTPUT SPECIFICATIONS

Input Specification


Specification	Report
Frequency	50Hz or 60Hz
Input Burden	0,5VA(MAX)

Output Load Resistance

Output	1 Point	2 Point		Remark
	Output	Output-1	Output-2	
4 ~ 20mA	700 Ω	600 Ω	350 Ω	(Max)
0 ~ 20mA	700 Ω	600 Ω	350 Ω	(Max)
2 ~ 10mA	1200 Ω	1200 Ω	700 Ω	(Max)
1 ~ 5V	5000 Ω	5000 Ω	5000 Ω	(Min)
0 ~ 1V	1000 Ω	1000 Ω	1000 Ω	(Min)

BLOCK DIAGRAM

1 Point Output

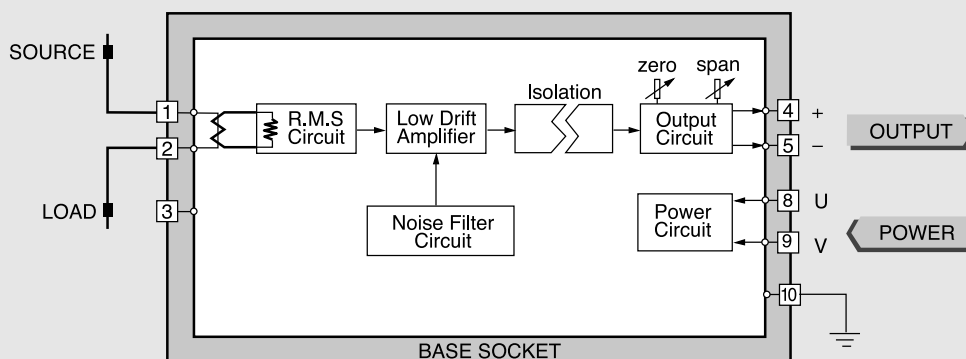

2 Point Output

